


DATA SHEET




| | | |
|--|-------------------|----------------|
| Dimensions, Weight & Mount | | |
| External Dimensions (Height x Width x Depth) | mm | 746X446X200 |
| External Dimensions (Height x Width x Depth) With Flange | mm | 783X483X200 |
| Weight | kg | 32 |
| Mounting Method | | Door Mounted |
| Application | | Outdoor |
| Environmental Protection & Performance | | |
| Working Temperature Range | C | -40 to +55 |
| Noise Level | dB(A) | 65 |
| Protection from Dust, Water and Wind Driven Rain | | IP 55 |
| Refrigerant | | R134a |
| RoHS Compliant | | Yes |
| Cooling/Heating Capacity | | |
| Cooling Capacity@L25/L35 | W | \ |
| Cooling Capacity@L35/L35 | W | 1500 |
| Heating Capacity (Optional) | W | 1000 |
| Power Consumption | | |
| Power Consumption@L25/L35 | W | \ |
| Power Consumption@L35/L35 | W | 600 |
| Current@L25/L35 | A | \ |
| Current@L35/L35 | A | 2.90 |
| Airflow | | |
| Internal Airflow | m ³ /h | 400 |
| Power Supply | | |
| Power Supply Range | V, Hz | 220±15%, 50/60 |
| Rated operating voltage - Controller | V, Hz | 220, 50/60 |
| Rated operating voltage - Cooling/Heating System | V, Hz | 220, 50/60 |
| Max. Current | A | 5.5 |

COOLING CAPACITY CURVE

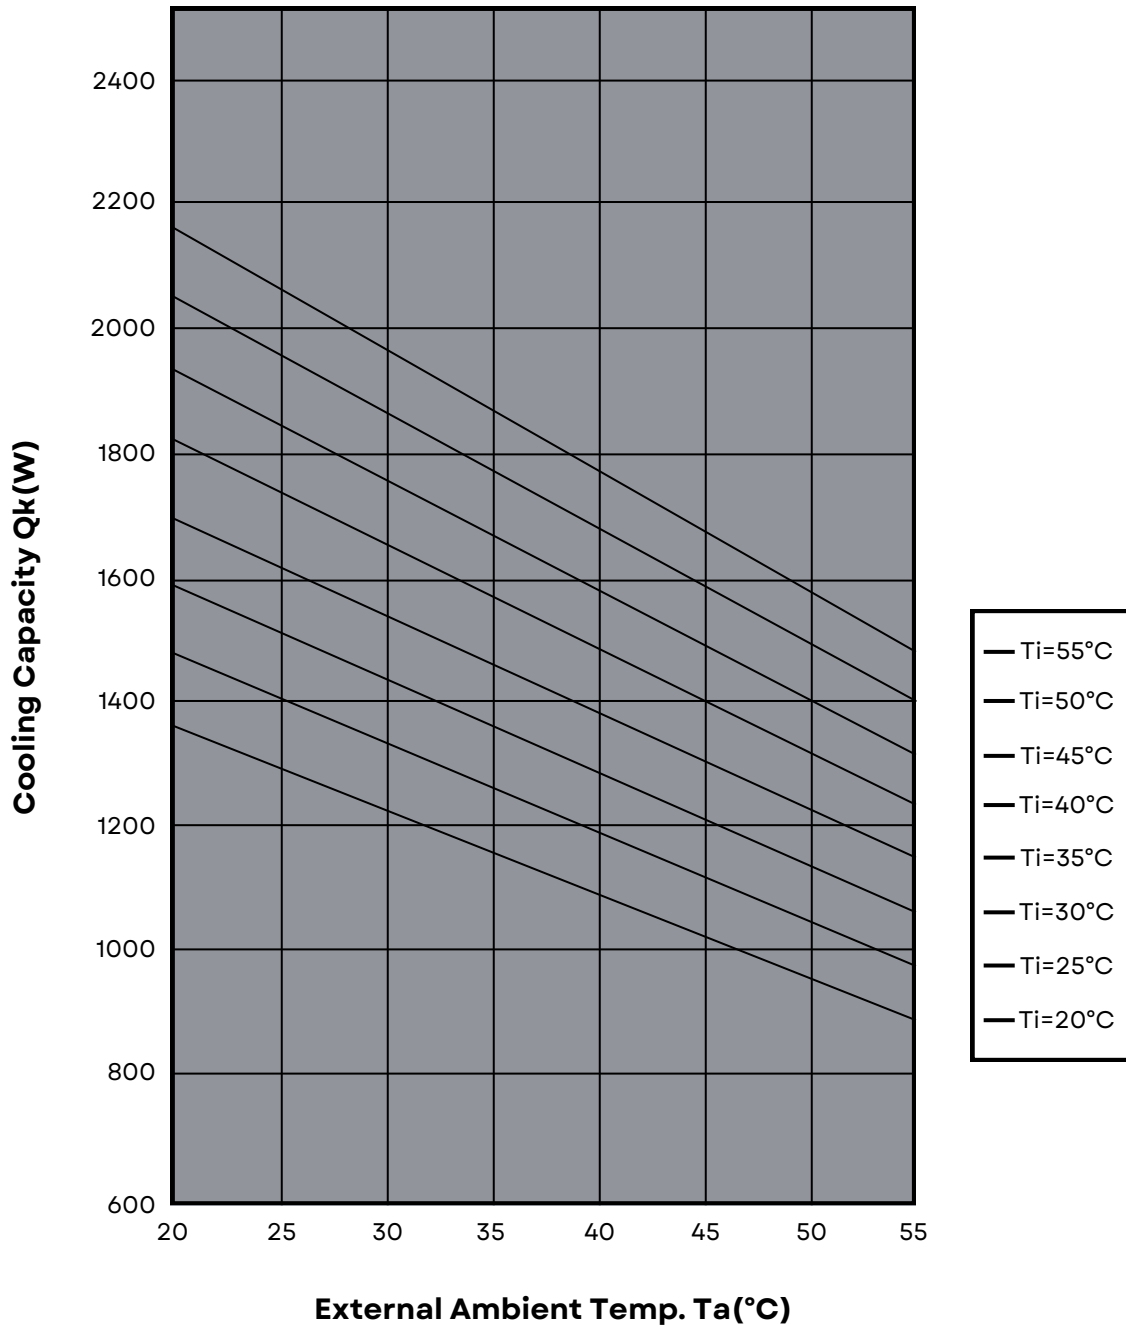

CONSUMPTION CURVE

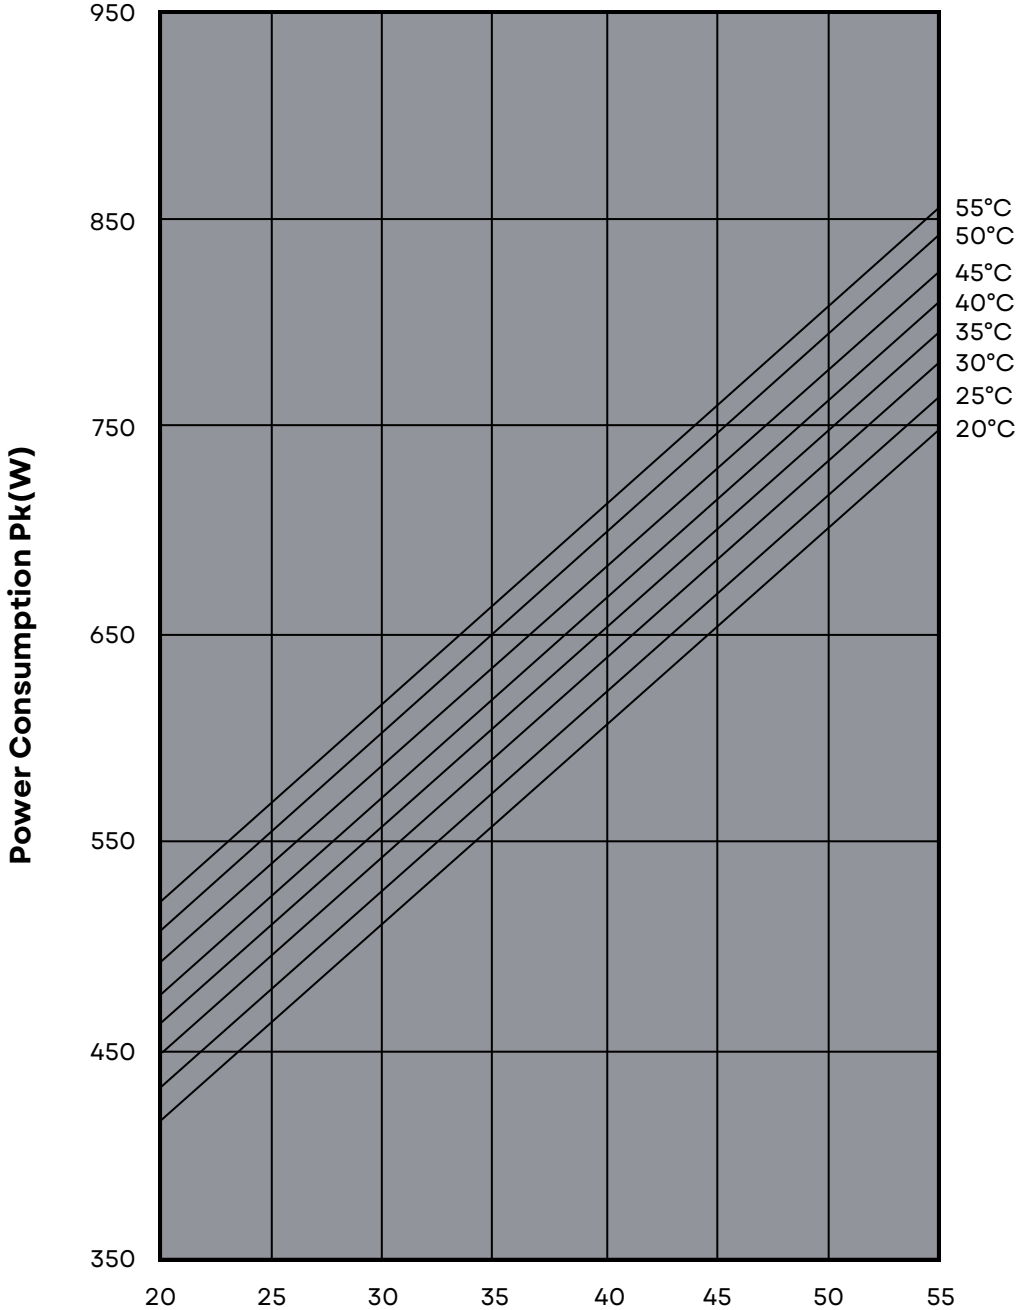

DIMENSIONS

